



Diesel Exhaust Fluid Break Away

FLEX-ING™ brand diesel exhaust fluid 3/4" break aways provide in-line protection for hanging hardware in the event of a drive off. These break aways feature a stainless steel design and internal components that make them completely compatible with DEF/ AdBlue®. Upon separation the check valve in each half of the break away seals instantly, preventing fuel from escaping at both ends.

Highlights

- Consistent separation force.
- Ball check valves seal both halves of the break away instantly upon separation.
- Machined from solid stainless steel bar stock.
- The two halves of the break away are sealed before the check valves open creating a completely dry break.

Ordering Information


Model	Description
BRK34SS-N	3/4" NPT DEF break away
BRK34SS-P	3/4" BSPP DEF break away

Specifications

- Body and valve: Stainless steel
- Check valve: PTFE
- Seals: Viton®
- Ring cover: Nylon (integrated)
- Maximum working pressure: 50 PSI
- Break rings break force: 325 lbs.
- Height: 3.25"

Installation

- 1 3/4" BSPP or NPT whip hose end fitting
- 2 3/4" BSPP or NPT break away inlet
- 3 3/4" BSPP or NPT break away inlet
- 4 3/4" BSPP or NPT curb hose end fitting
- 5 Hose end fitting to nozzle

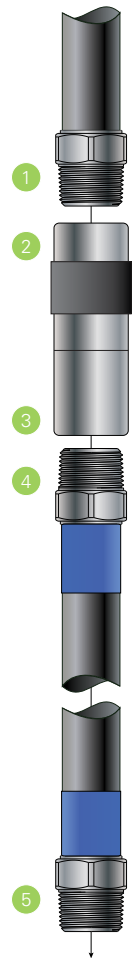

FLEX-ING™

A Franklin Fueling Systems Brand

frankinfueling.com

3760 Marsh Rd. • Madison, WI 53718, USA
Tel: +1 608 838 8786 • Fax: +1 608 838 6433
Tel: USA & Canada +1 800 225 9787 • Tel: UK +44 (0)1473 243300
Tel: Mex 001 800 738 7610 • Tel: FR +33 (0)1 69 21 41 41 • Tel: CH +86 10 8565 4566

