


BENDING CABLE TIGHT™ COATED RIGID METAL CONDUIT

6' sticks of polyethylene coated rigid conduit must be bent only inside the safe bend zone. To identify the safe bend zone, use the measurements below. These are measured from the non-threaded end of the stick:

CAUTION: If you do not bend polyethylene coated rigid conduit within the safe bend zone, the integrity of the conduit can be damaged, and your warranty can be voided.

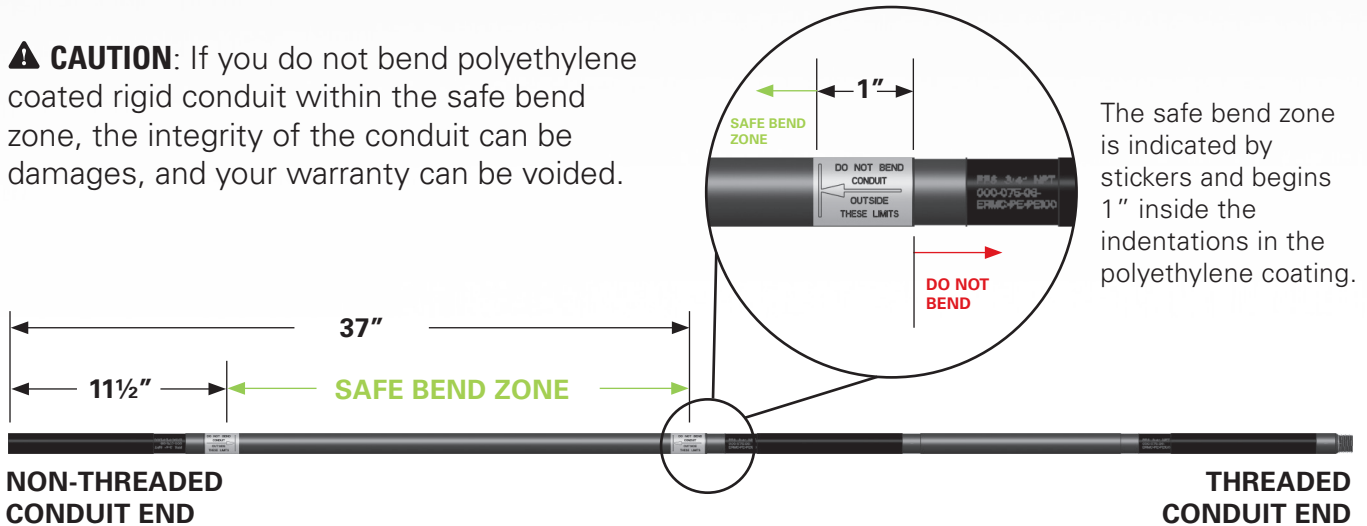

CAUTION: Bending coated rigid conduit within the safe bend zone will yield the following maximum and minimum bent conduit heights. If a shorter installation height is required, you can cut the conduit to height and re-thread it.

